

Selector Valve

HOF 20




Features

- HOF20 series for diverting a single oil flow to either of two hydraulic circuits features.
- 3-Port, cast iron construction.
 - Simple, push-pull operation.
 - Working pressure up to 3000 psi and flow capacity up to 25 gpm.



Ordering Code

Selector Valve

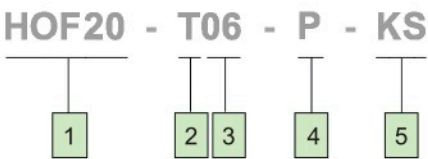

1 Model : HOF20

2 Mounting
T - Threaded connections

3 Valve size
06 - 3/4"

4 Threaded size

Code	Thread size
P	3/4" BSPT
S	1.0625"-12UN-2B

5 Spool Control

Spool Control		
Code	Description	Scheme
K	Standard knob	
KS	Spring return with knob	
CS	Spring return with cam	